

Moment

Specification Sheet | DZ 100/200



The streamlined profile of the Moment collection exemplifies a masterful blend of design purity and functional adaptability. Its minimalist aesthetic, focused on essential geometric forms, achieves a harmonious balance from base to luminaire. Seamless transitions between elements further enhance the design. Fasteners linking base to pole, pole to arm, and arm to luminaire are concealed within the housing, enhancing its sleek modernity.

Moment area light merges sleek minimalism with enhanced performance. Luminaires can tilt up to 50 degrees and lock in 10-degree increments with a range of available pole heights, making it suitable for a wide variety of applications. Options include a selection of roadway and accent distribution types, up to 10,000lm delivered, a deep-set light engine, and an optional hexcell louvre that ensure precise illumination with minimal glare.

Housing & Materials

Cast Aluminum and cast Stainless Steel construction. Factory sealed and replaceable light engine cartridge with UV stable, impact modified clear or diffused acrylic lens. With a 'fastener free' look, all hardware is magni-coated for optimum corrosion and 'anti-seize' protection. Assembly is IP66 rated.


Electrical

Surge protected 120V - 277V 50/60Hz electronic driver located internal to luminaire arm, 0-10V dimmable. Optional pole mounted ANSI C136.41 twist lock receptacle and GFCI outlet (with 'in-use' cover) are available.

Light Engine

Moment features a replaceable LED cartridge with die-cast aluminum heatsink, high power LEDs on a RoHS compliant circuit board with secondary optics in either Roadway or Accent distribution types. Accent distributions feature a 3" recessed depth, and optional hexcell louvre. All configurations are available in 2700K, 3000K, and 4000K. >80CRI across all available color temperatures. Luminaires meet or exceed TM21 L70: >60,000 hrs.

Distributions

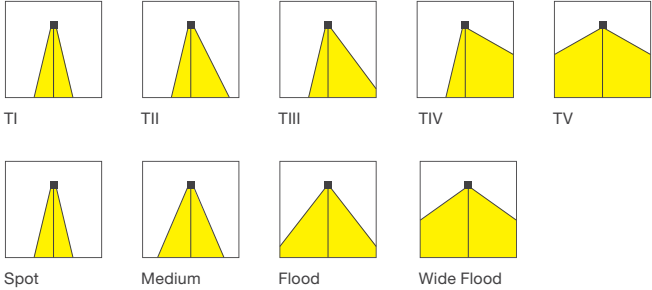

Warranty

Luminaires are warranted for six years.

Certification

UL Listed for Wet Location, International Dark Sky Approved, Buy America Compliant, RoHS Compliant, cUL



Designed by Yonoh Creative Studio

[Click here](#) for patent information related to this product.

Specification Sheet | DZ 100/200

Specification

Luminaire #1 _____

Luminaire #2 _____

If applicable

Luminaire #3 _____

If applicable

Pole _____

May include arms, base covers, GFCI, NEMA7 socket, etc.

Luminaire and Mounting Configurations – Roadway/Area Optic – 100 Series

Product	LED Configuration	Drive Current	Color Temp	Distribution	Lens	Powdercoat
DZ101 (Single Luminaire)	30 (30 LED)	SO (Standard Output)	27K (2700K)	T1 (Type I)	CLR (Clear)	See powdercoat color options on the Material / Colors Sheet.
DZ102 (2 Luminaires - back to back)	50 (50 LED)	HO (High Output)	30K (3000K)	T2 (Type II)	FRS (Frosted)	
			40K (4000K)	T3 (Type III)		
				T4 (Type IV)		
				T5 (Type V)		

Example: DZ102 – 50 – HO – 30K – TIII – CLR – MBK

Luminaire and Mounting Configurations – Accent Optic – 200 Series

Product	LED Configuration	Drive Current	Color Temp	Distribution	Louvre	Lens	Powdercoat
DZ201 (Single Luminaire)	30 (30 LED)	SO (Standard Output)	27K (2700K)	SP (Spot (20°))	LV1 (Louvre-With)	CLR (Clear)	See powdercoat color options on the Material / Colors Sheet.
DZ202 (2 Luminaires - back to back)	50 (50 LED)	HO (High Output)	30K (3000K)	ME (Medium (25°))	NLV (Louvre-Without)	FRS (Frosted)	
			40K (4000K)	FL (Flood (45°))			
				WF (Wide Flood (75°))			

Example: DZ202 – 50 – HO – 30K – ME – LV1 – CLR – MBK

Pole and Luminaire Configuration

Product	Lens height and mounting configuration	Base Cover Option	Twist Lock Receptacle	GFCI with 'in use' cover	Photo / Motion Sensor	Powdercoat
DZP (Pole)	12-A (Single 12')					See powdercoat color options on the Material / Colors Sheet.
	14-A (Single 14')					
	16-A (Single 16')					
	20-A (Single 20')					
	25-A (Single 25')					
	12-B (Back to back 12')					
	14-B (Back to back 14')	BC (Base Cover)	NTW (No Twist Lock)	R (With Power Receptacle)	MS1 (With Motion Sensor)	
	16-B (Back to back 16')	NUT (Nut Covers)	TW1 (With Twist Lock)	NR (Without Power Receptacle)	NMS (No Motion Sensor)	
	20-B (Bback to back 20')					
	25-B (Back to back 25')					
	16-C (Staggered 16')					
	20-C (Staggered 20')					
	25-C (Staggered 25')					
25-D (Spiral 25')						

Example: DZP – 12-A – BC – TW1 – R – MS1 – MBK

Pole Modifications


Part Number	Modification	Description
CAM	Camera	
SPE	Speaker	
WAP	WiFi Access Point	
BAN	Banner Arms	
VIB	Vibration Dampener	
CPH	Custom Pole Height	
CLH	Custom Lens Height	
CPC	Custom Powdercoat Color	
--	Other	

Modifications listed are the most common changes/additions requested. If your requirements aren't shown here, select 'other' and write in the modification needed. Please provide as much detail as possible to streamline the quoting process. All modifications to standard products will require evaluation and quoting approved by Landscape Forms prior to order placement.

Moment


Specification Sheet | DZ 100/200

Lens Height and Pole Configuration Selection Guide

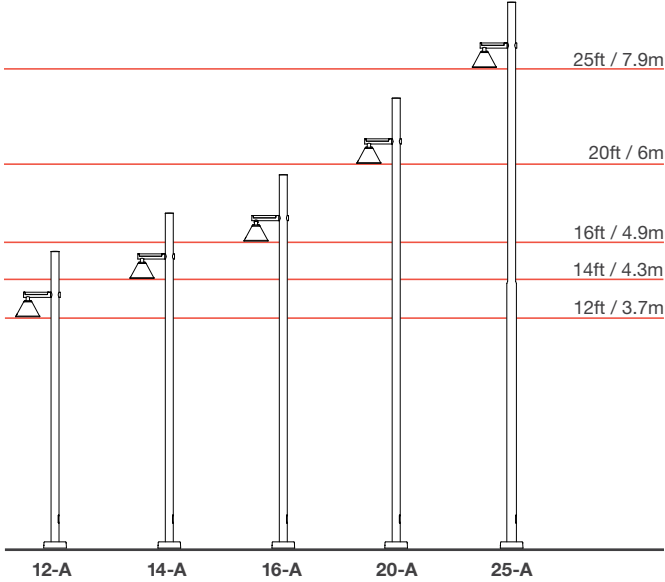

Compatible Luminaries

	100 Series	200 Series
Single	DZ101	DZ201

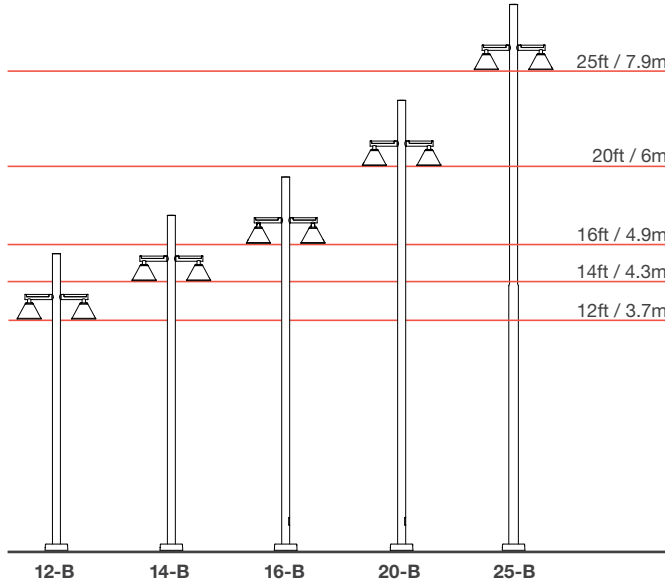



Compatible Luminaries

	100 Series	200 Series
Single	DZ102	DZ202

Moment

Specification Sheet | DZ 100/200

Lens Height and Pole Configuration Selection Guide

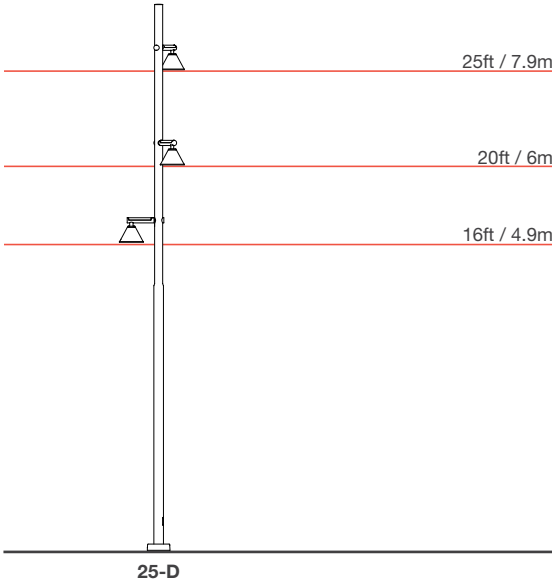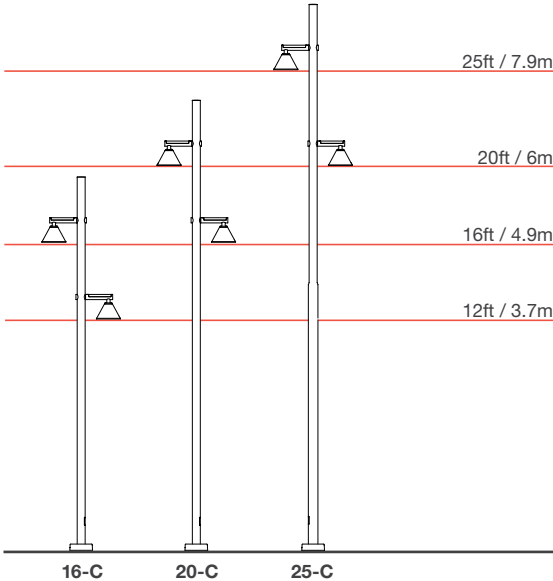


Compatible Luminaires

	100 Series	200 Series
Single	DZ101	DZ201

	100 Series	200 Series
Single	DZ101	DZ201

Pole & Base Cover

Poles are manufactured from seamless aluminum alloy with a flush mounted hand hole cover. Base plate is cast aluminum and includes either a two-piece cast aluminum decorative base cover, or four cast aluminum nut covers. Mounting template and anchor hardware included. Anchor bolts conform to ASTM F1554 Grade 55 and are provided with two hex nuts and two flat washers. Bolts have an “L” bend on one end and are galvanized a minimum of 12” on the threaded end. Poles are pre-drilled to suit the specified mounting conditions prior to powdercoating, and include flush top pole cap, configured to support installation of ANSI C136.41 twist-lock receptacle when specified. configured to support installation of ANSI C136.41 twist-lock receptacle when specified.



Mounting

Cast stainless steel mounting brackets attach to a pre-drilled 5” diameter section of pole via a through-bolt arrangement. Single luminaire or back to back arrangement. Luminaire arm attaches to bracket via 4 bolts internal to the driver housing/arm. All hardware made from stainless steel.

Moment



Specification Sheet | DZ 100/200


Wind Load Chart

Part Number	Description	Wall Thickness (in)	# of Luminaires	Total Weight of Luminaire(s) (lbs)	Total Luminaire(s) EPA (ft2)	Max EPA at 90 MPH (ft2)	Max EPA at 100 MPH (ft2)	Max EPA at 110 MPH (ft2)	Max EPA at 120 MPH (ft2)	Max EPA at 130 MPH (ft2)	Max Wind Speed		
											Max Wind Speed (MPH)	Base Overturning Moment (ft-lbf)	Base Shear (lbf)
DZP-12-A	5"x12ft pole, single luminaire	0.188	1	31.75	0.568	10.3	8	6.4	5.3	4.4	237	4643	510
DZP-12-B	5"x12ft pole, back to back luminaires	0.188	2	62.02	1.111	10.3	8	6.4	5.3	4.4	207	4593	456
DZP-14-A	5"x14ft pole, single luminaire	0.188	1	31.75	0.568	8.2	6.3	5	4	3.3	213	4631	457
DZP-14-B	5"x14ft pole, back to back luminaires	0.188	2	62.02	1.111	8.2	6.3	5	4	3.3	188	4595	411
DZP-16-A	5"x16ft pole, single luminaire	0.188	1	31.75	0.568	6.3	4.7	3.6	2.9	2.3	193	4630	413
DZP-16-B	5"x16ft pole, back to back luminaires	0.188	2	62.02	1.111	6.3	4.7	3.6	2.9	2.3	161	4556	381
DZP-16-C	5"x16ft pole, staggered height luminaires	0.188	2	63.50	1.135	6.3	4.7	3.6	2.9	2.3	172	4607	405
DZP-20-A	5"x20ft pole, single luminaire	0.188	1	31.75	0.568	3.3	2.1	1.5	1	0.7	137	4577	354
DZP-20-B	5"x20ft pole, back to back luminaires	0.188	2	62.02	1.111	3.3	2.1	1.5	1	0.7	117	4529	335
DZP-25-A	6" to 5" 25ft step pole, single luminaire	0.188	1	31.75	0.568	4.2	3.1	2.3	1.7	1.3	158	6633	432
DZP-25-B	6" to 5" 25ft pole, back to back luminaires	0.188	2	62.02	1.111	4.2	3.1	2.3	1.7	1.3	135	6550	404
DZP-25-C	6in dia to 5in dia x 25ft pole, staggered height luminaires	0.188	2	63.50	1.135	4.2	3.1	2.3	1.7	1.3	143	6572	423
DZP-25-D	6" to 5" 25ft step pole, 3-luminaire spiral	0.188	3	95.25	1.703	4.2	3.1	2.3	1.7	1.3	133	6597	424


Moment

Specification Sheet | DZ 100/200


100 Series Luminaire Dimensions, Weights and EPA's




DZ101
 Weight: 28.5lbs
 EPA: 0.5675ft²

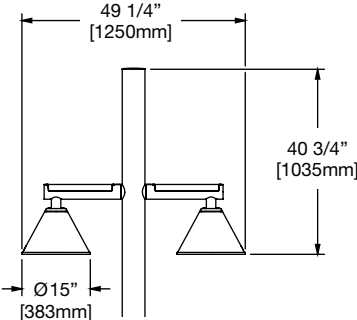

DZ102
 Weight: 52.1 lbs
 EPA: 1.1107ft²

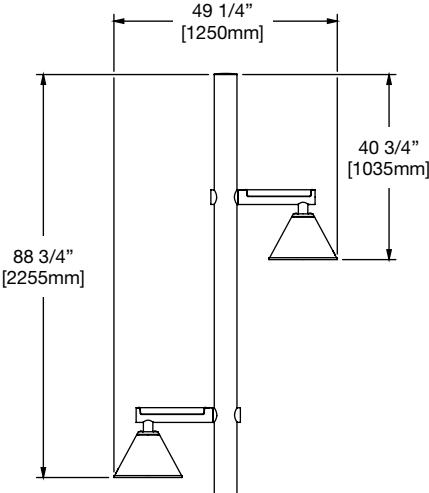

DZ101
 Weight: 57lbs
 EPA: 1.135ft²

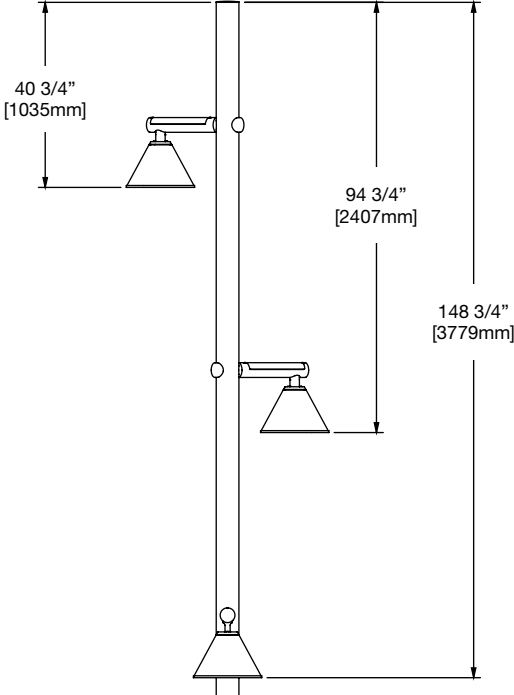


DZ101
 Weight: 85.5lbs
 EPA: 1.7025ft²


Moment

Specification Sheet | DZ 100/200


200 Series Luminaire Dimensions, Weights and EPA's

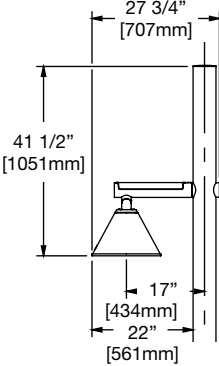


DZ201
 Weight without Louvre: 30lbs
 Weight with Louvre: 31.75lbs
 EPA: 0.5675ft²

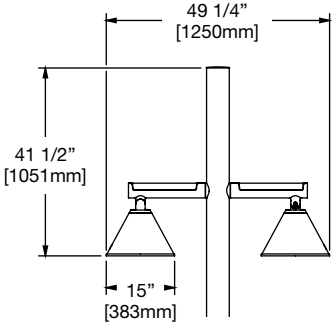

DZ202
 Weight without Louvre: 58.62lbs
 Weight with Louvre: 62.02lbs
 EPA: 1.1107ft²

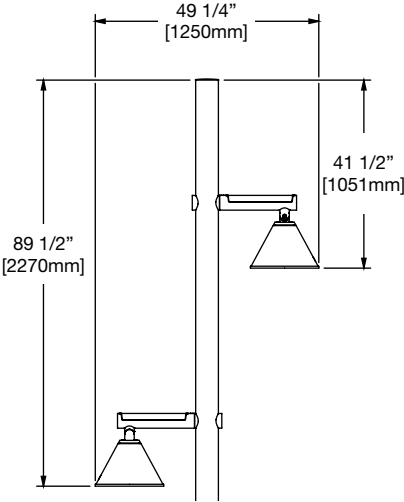

DZ201
 Weight without Louvre: 60lbs
 Weight with Louvre: 63.5lbs
 EPA: 1.135ft²

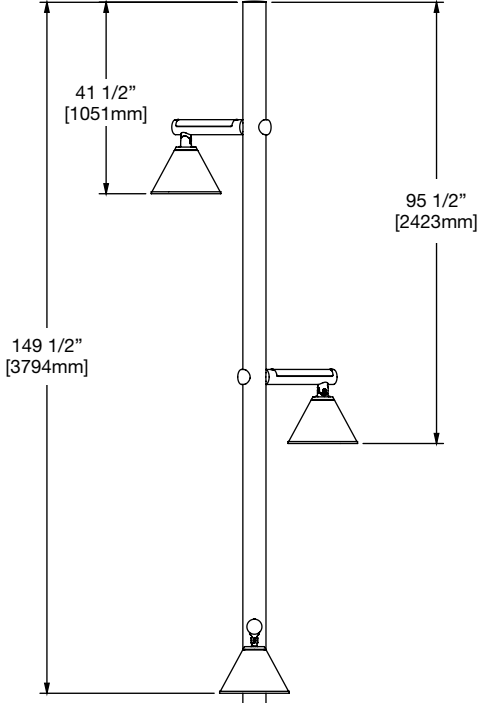


DZ201
 Weight without Louvre: 90lbs
 Weight with Louvre: 95.25lbs
 EPA: 1.7025ft²

Moment


Specification Sheet | DZ 100/200

Luminaire & Pole Accessories

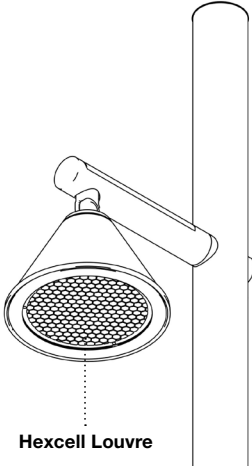

Hexcell Louvre



For use with accent optics only.

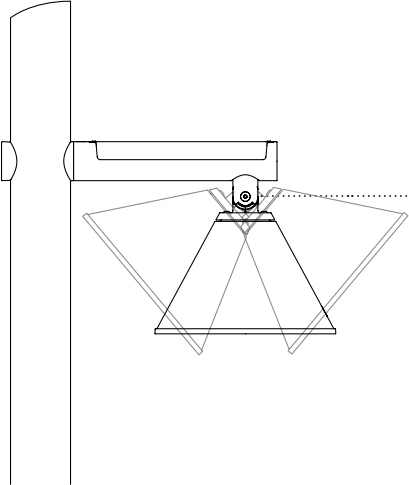

Tilt adjustable luminaire for accent lighting
Up to 50° tilt in 10° increments.

GFCI Outlet with In-use Cover

Placement approx 3' above grade and 180° from handhole.

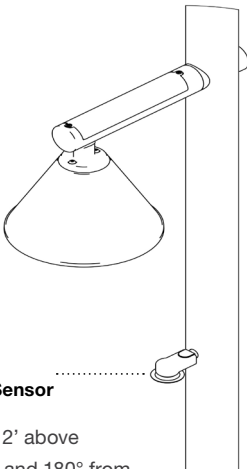

Single Luminaire PIR Photo/motion Sensor

Placement approx 12' above grade on all heights and 180° from handhole, except 10' above grade on the 12' lens height version.

Twist Lock Location



Luminaire Performance Data – Roadway/Area Optic 100 Series

LED Quantity	Drive Current	Lens	Distribution Type	Lumen Output	Efficacy	Input Power (W)	BUG Rating
30	SO	Clear	T1	2553	128	20	B1-U0-G1
			T2	2550	128	20	B1-U0-G1
			T3	2406	120	20	B1-U0-G1
			T4	2275	114	20	B1-U0-G1
			T5	2493	125	20	B1-U0-G0
		Frosted	T1	2291	115	20	B1-U0-G1
			T2	2288	114	20	B1-U0-G1
			T3	2169	108	20	B1-U0-G1
			T4	2005	100	20	B1-U0-G1
			T5	2210	111	20	B1-U0-G1
	HO	Clear	T1	5121	116	44	B2-U0-G2
			T2	5116	116	44	B1-U0-G1
			T3	4827	110	44	B1-U0-G1
			T4	4565	104	44	B2-U0-G2
			T5	5002	114	44	B2-U0-G1
		Frosted	T1	4605	105	44	B2-U0-G1
			T2	4599	105	44	B1-U0-G1
			T3	4352	99	44	B1-U0-G1
			T4	4029	92	44	B1-U0-G1
			T5	4442	101	44	B2-U0-G1
50	SO	Clear	T1	7501	123	61	B2-U0-G2
			T2	7493	123	61	B2-U0-G2
			T3	7071	116	61	B2-U0-G2
			T4	6686	110	61	B2-U0-G2
			T5	7326	120	61	B3-U0-G1
		Frosted	T1	6734	110	61	B2-U0-G2
			T2	6724	110	61	B2-U0-G1
			T3	6364	104	61	B1-U0-G1
			T4	5892	97	61	B2-U0-G1
			T5	6494	106	61	B2-U0-G1
	HO	Clear	T1	9747	117	83	B3-U0-G3
			T2	9737	117	83	B2-U0-G2
			T3	9188	111	83	B2-U0-G2
			T4	8688	105	83	B2-U0-G2
			T5	9520	115	83	B3-U0-G1
		Frosted	T1	8751	105	83	B3-U0-G2
			T2	8738	105	83	B2-U0-G2
			T3	8270	100	83	B2-U0-G1
			T4	7656	92	83	B2-U0-G1
			T5	8439	102	83	B3-U0-G1

Lumen output scaling factors: 2700K (0.947), 3500K (1.046), 4000K (1.053)

Luminaire Performance Data – Accent Optic 200 Series

LED Quantity	Drive Current	Lens	Beam Angle	Lumen Output	Efficacy	Input Power (W)	Peak Intensity (cd)
30	SO	Clear	SP	2477	118	21	13001
			SP+LV1	1352	64	21	10845
			ME	2351	112	21	8755
			FL	2349	112	21	4599
		WF	2473	118	21	1598	
		Frosted	SP	2429	116	21	8765
			ME	2297	109	21	6194
			FL	2316	110	21	4090
	WF		2268	108	21	1521	
	HO	Clear	SP	4953	113	44	26001
			SP+LV1	2703	61	44	21690
			ME	4701	107	44	17510
			FL	4697	107	44	9225
		WF	4945	112	44	3196	
		Frosted	SP	4861	110	44	17563
			ME	4596	104	44	12411
FL			4629	105	44	8179	
WF	4539		103	44	3047		
50	SO	Clear	SP	7095	114	62	37285
			SP+LV1	3872	62	62	31102
			ME	6734	109	62	25109
			FL	6729	109	62	13645
		WF	7084	114	62	4583	
		Frosted	SP	6957	112	62	25139
			ME	6579	106	62	17763
			FL	6626	107	62	12003
	WF		6496	105	62	4361	
	HO	Clear	SP	9338	113	83	49059
			SP+LV1	5096	61	83	40924
			ME	8863	107	83	33038
			FL	8856	107	83	17730
		WF	9324	112	83	6030	
		Frosted	SP	9157	110	83	33077
			ME	8659	104	83	23373
FL			8721	105	83	15794	
WF	8550		103	83	5738		

Lumen output scaling factors: 2700K (0.947), 3500K (1.046), 4000K (1.053)

Moment


Specification Sheet | DZ 100/200

100 Series - 30 LED SO CLR lens at 12'


Performance light engine @ 3000K

1.0fc 0.5fc 0.2fc


12' Lens Height, Type I

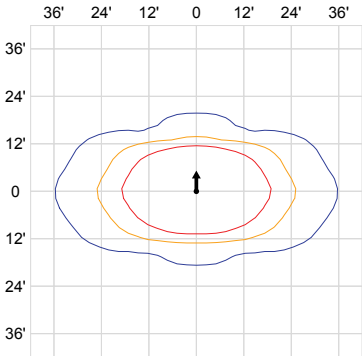


12' Lens Height, Type II

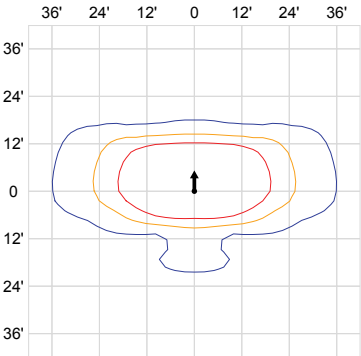


12' Lens Height, Type III

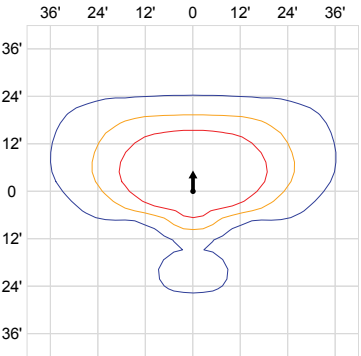

12' Lens Height, Type IV

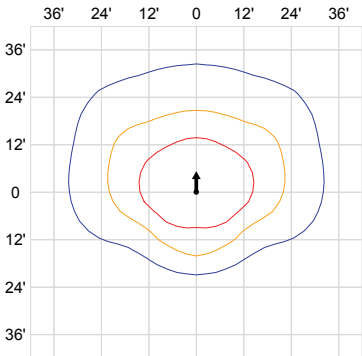

12' Lens Height, Type V





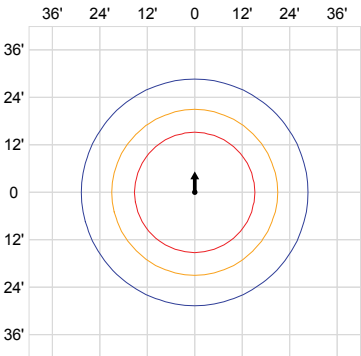


Moment

Specification Sheet | DZ 100/200

100 Series - 30 LED HO CLR lens at 14'
 Performance light engine @ 3000K

1.0fc 0.5fc 0.2fc

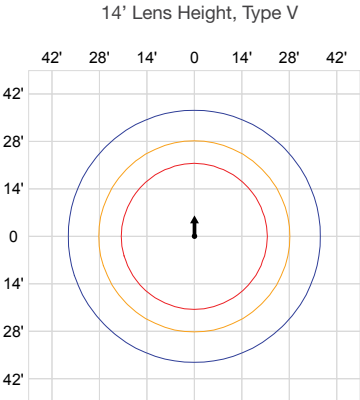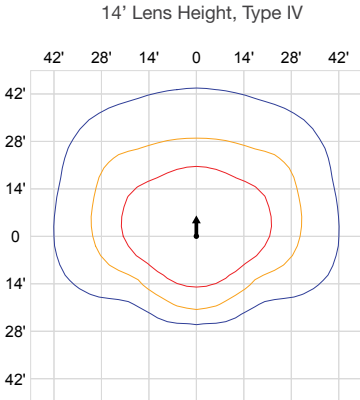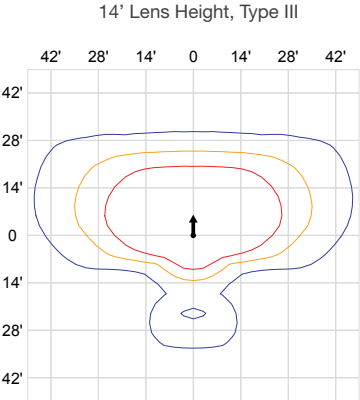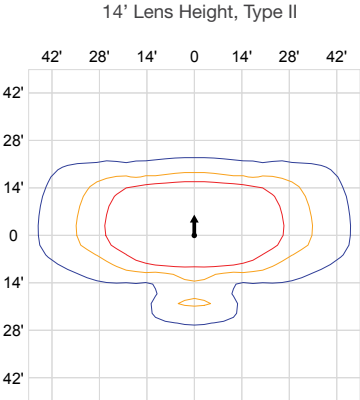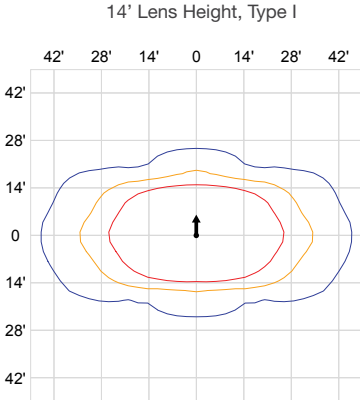

Moment


Specification Sheet | DZ 100/200

100 Series - 50 LED SO CLR lens at 16'


Performance light engine @ 3000K

1.0fc 0.5fc 0.2fc


16' Lens Height, Type I

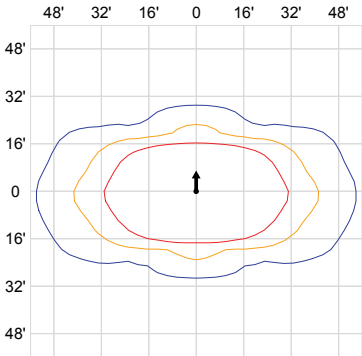


16' Lens Height, Type II

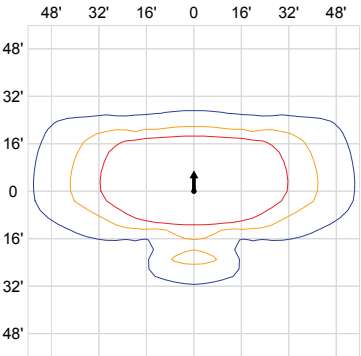


16' Lens Height, Type III

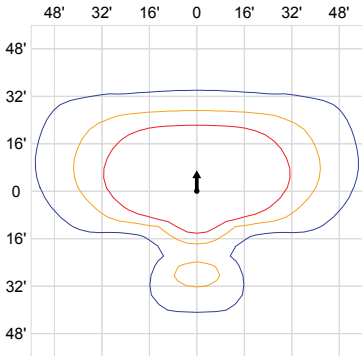

16' Lens Height, Type IV

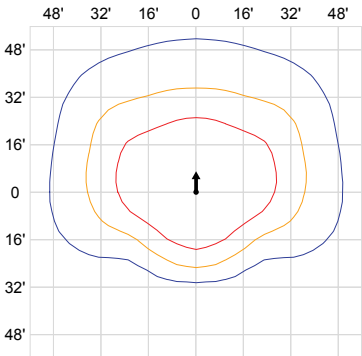

16' Lens Height, Type V

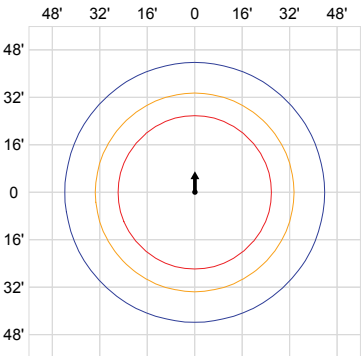

Moment


Specification Sheet | DZ 100/200

100 Series - 50 LED HO CLR lens at 20'


Performance light engine @ 3000K

1.0fc 0.5fc 0.2fc


20' Lens Height, Type I

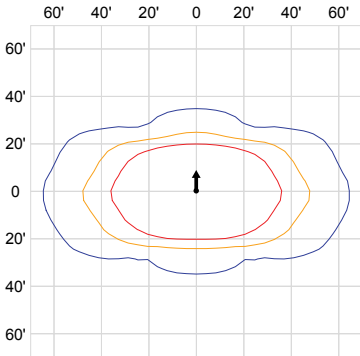


20' Lens Height, Type II

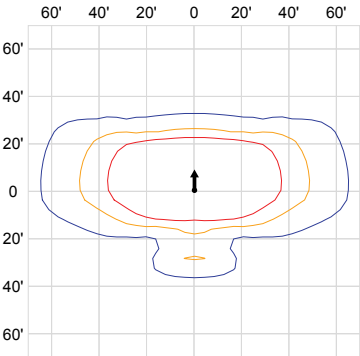


20' Lens Height, Type III

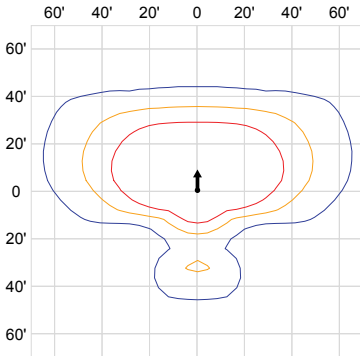

20' Lens Height, Type IV

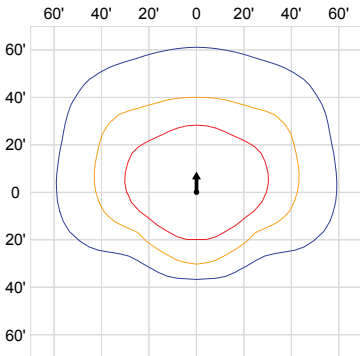

20' Lens Height, Type V

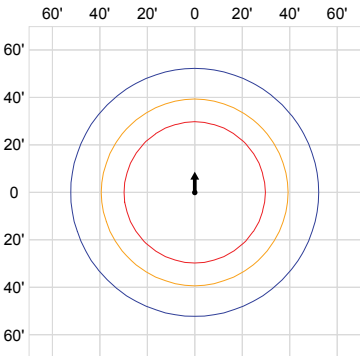

Moment


Specification Sheet | DZ 100/200

100 Series - 50 LED HO CLR lens at 25'


Performance light engine @ 3000K

1.0fc 0.5fc 0.2fc


25' Lens Height, Type I

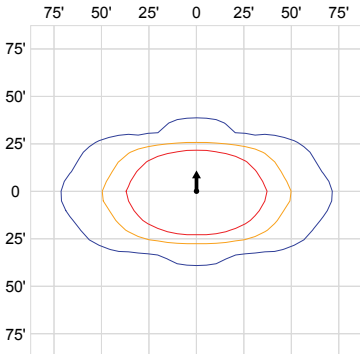


25' Lens Height, Type II

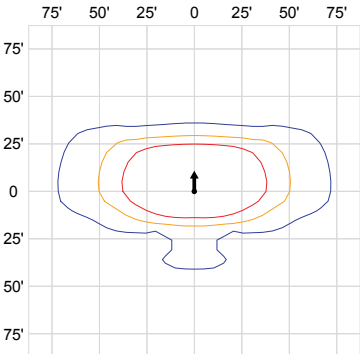


25' Lens Height, Type III

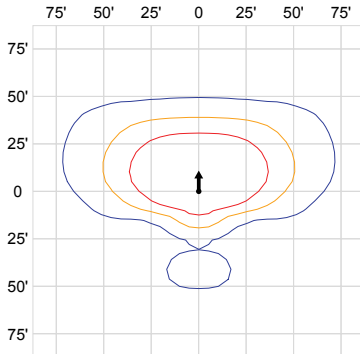

25' Lens Height, Type IV

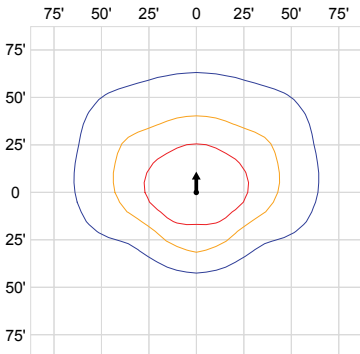

25' Lens Height, Type V

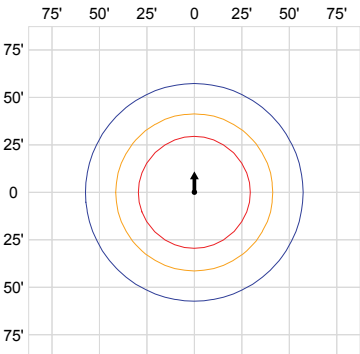

Moment



Specification Sheet | DZ 100/200

200 Series - 30 LED SO CLR lens



■ 10% max CD ■ 50% max CD

Performance light engine @ 3000K



Spot Optic 20° (SP)

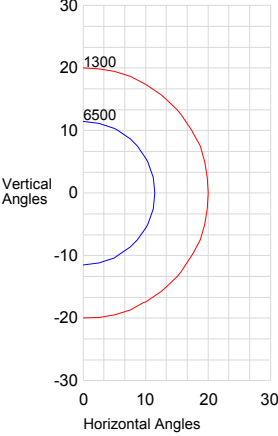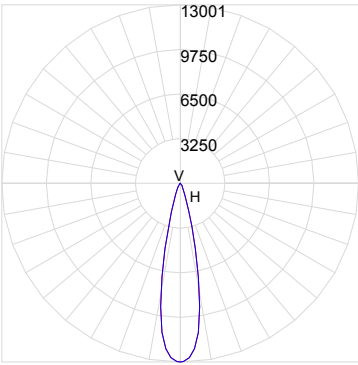



Medium 25° (ME)

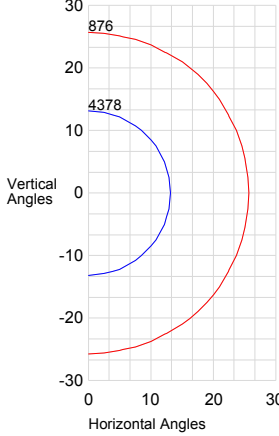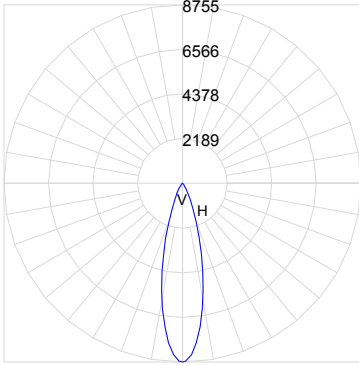

Flood 45° (FL)

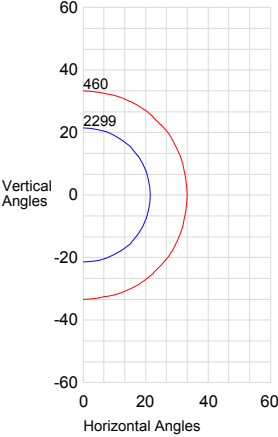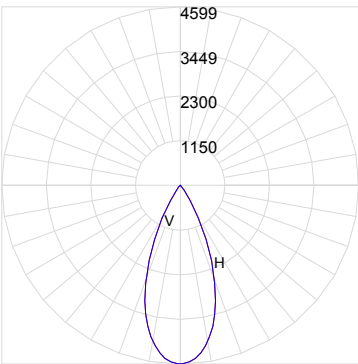

Wide Flood 75° (WF)

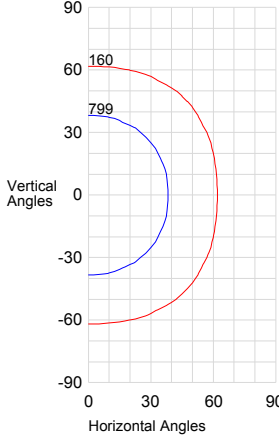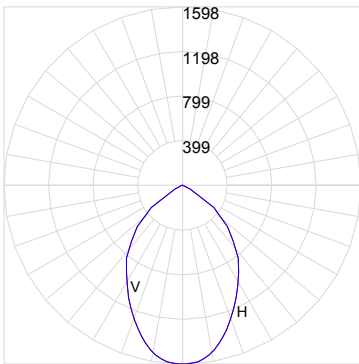

Moment



Specification Sheet | DZ 100/200

200 Series - 30 LED HO CLR lens



■ 10% max CD ■ 50% max CD

Performance light engine @ 3000K



Spot Optic 20° (SP)

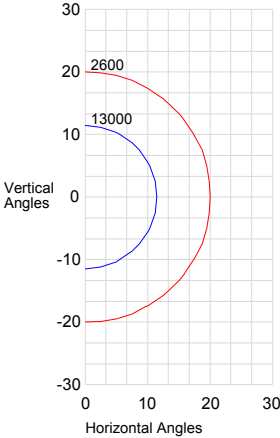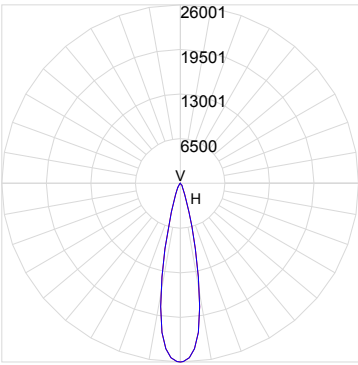



Medium 25° (ME)

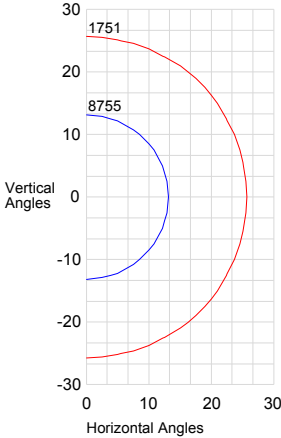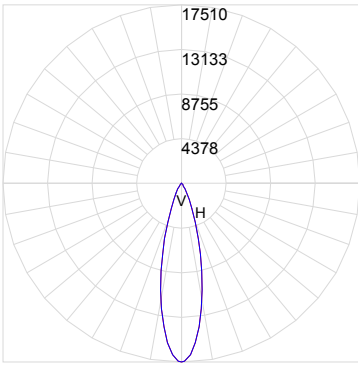

Flood 45° (FL)

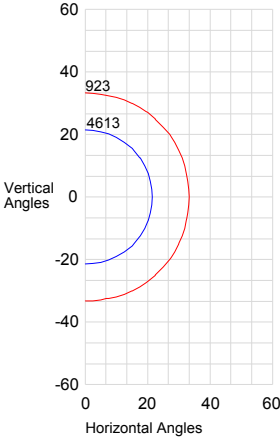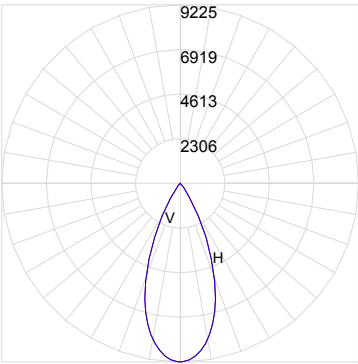

Wide Flood 75° (WF)

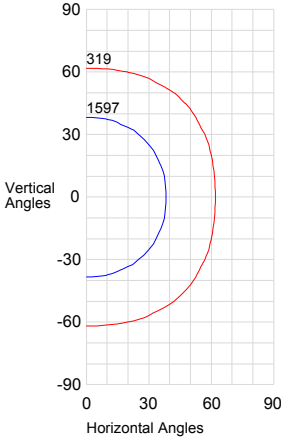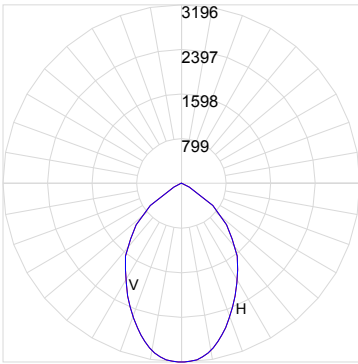

Moment



Specification Sheet | DZ 100/200

200 Series - 50 LED SO CLR lens



■ 10% max CD ■ 50% max CD

Performance light engine @ 3000K



Spot Optic 20° (SP)

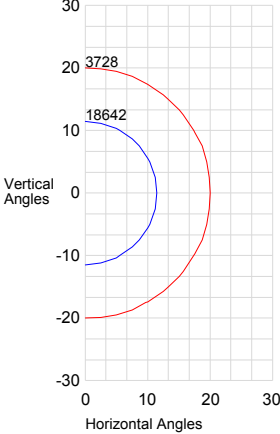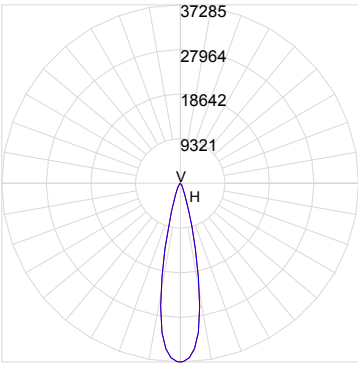



Medium 25° (ME)

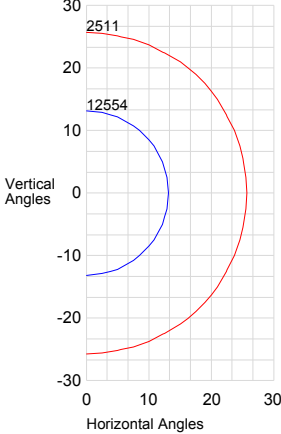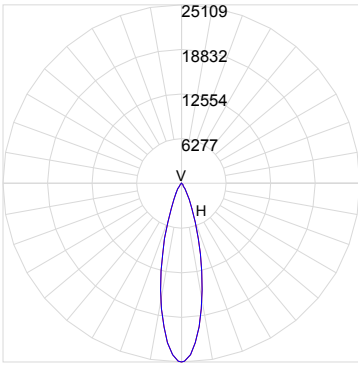

Flood 45° (FL)

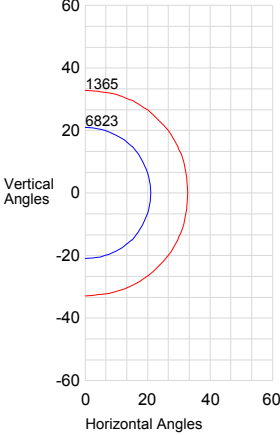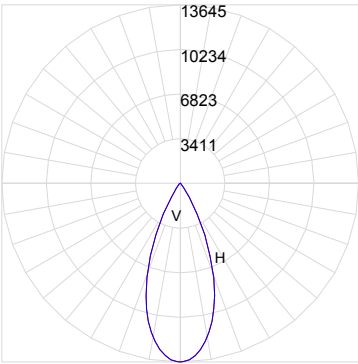

Wide Flood 75° (WF)

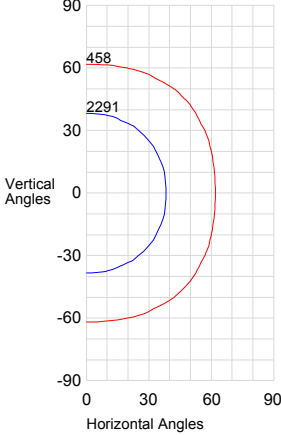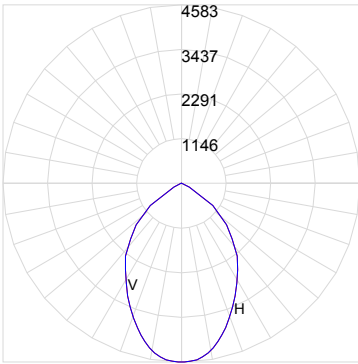

Moment



Specification Sheet | DZ 100/200

200 Series - 50 LED HO CLR lens



■ 10% max CD ■ 50% max CD

Performance light engine @ 3000K



Spot Optic 20° (SP)

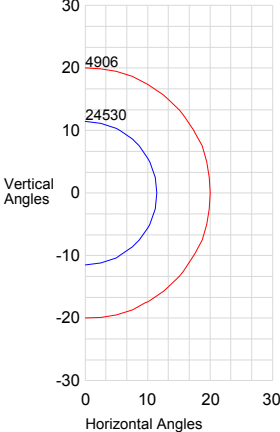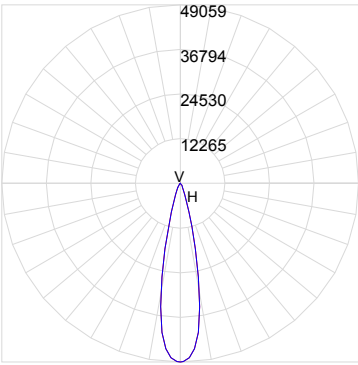



Medium 25° (ME)

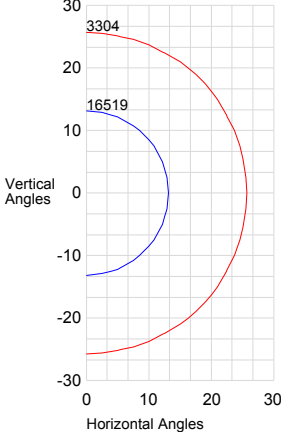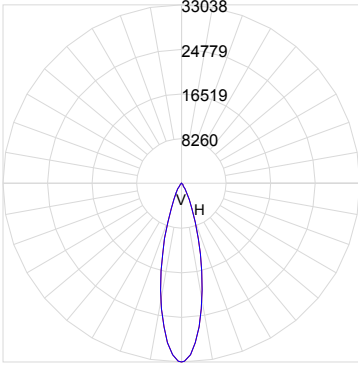

Flood 45° (FL)

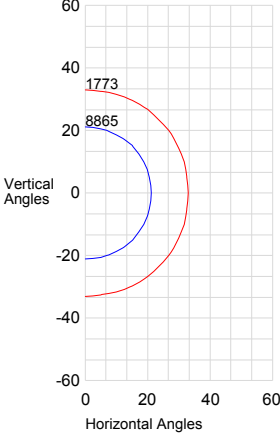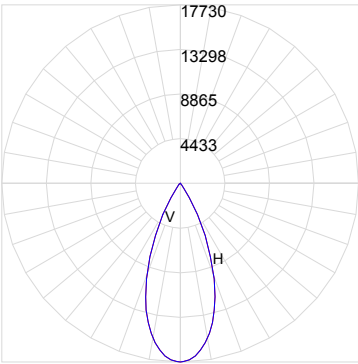

Wide Flood 75° (WF)

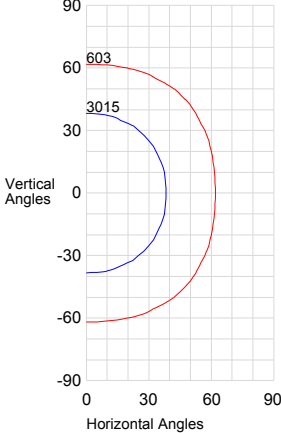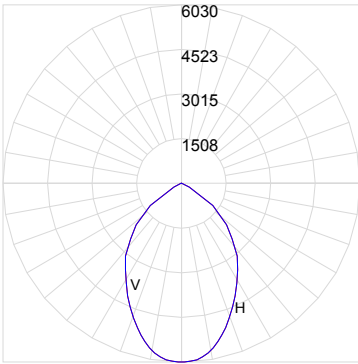

Moment

Specification Sheet | DZ 100/200


Architectural Series - Powdercoated Metal* (Fine Texture)



Neutral Series - Powdercoated Metal*



Vivid Series - Powdercoated Metal* (Fine Texture)

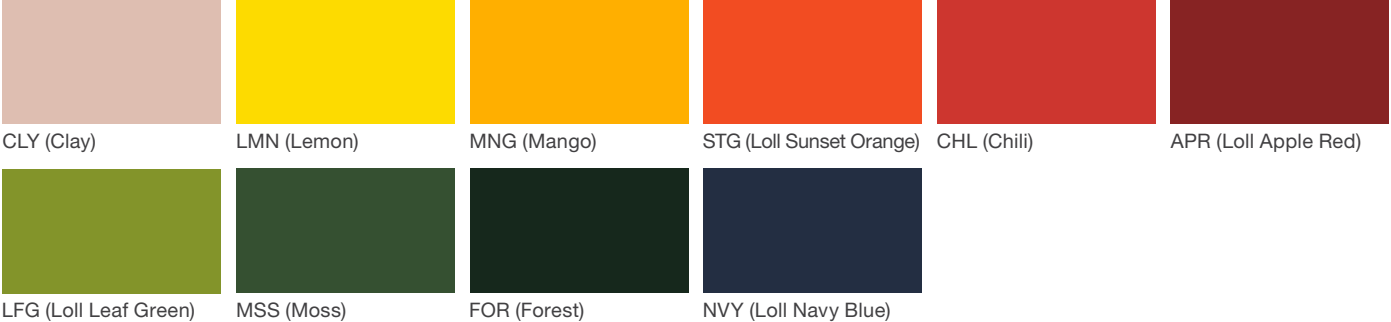

Powdercoated Metal

Powdercoated Metal Pangard II® Polyester Powdercoat is a hard, yet flexible, finish that resists rusting, chipping, peeling and fading. In addition to colors shown, a wide selection of optional and custom colors may be specified for an upcharge.

* All colors and patterns shown are approximate and may vary from sample and final.

Visit landscapeforms.com for more information.

Specifications are subject to change without notice.

©2024 Landscape Forms, Inc. Printed in U.S.A.

landscapeforms.com | specify@landscapeforms.com