



SHUFFLE CAM GEN2 EXTERNAL SOLUTION

SHUFFLE is a connected, modular approach to city hardware - with its plug-and-play rotatable modules that contain pre-certified hardware, it can be configured to suit your specific needs.

KEY ADVANTAGES

- > **Seamless integration in the SHUFFLE column**
- > **Professional camera network**
- > **Easy installation with patented mounting system**
- > **Compatible with the video management system**



The SHUFFLE CAM GEN2 (external) module offers a solution for integrating a camera in a discreet public CCTV solution. It is designed to offer cities a way to enhance and develop security in public areas.

Our selection of cameras support a broad range of applications from security to business intelligence and additional plug-ins offering new efficiencies and opportunities.

The range of full HD 1080 cameras with infrared capabilities are specifically chosen to provide excellent visibility under diverse conditions. IR LED can produce clear monochrome images in 0 lux conditions. The Intelligent Auto (iA) feature enables the camera to automatically adjust settings in real-time adapting to its surroundings, reducing distortion or motion blur.


Modules are in high-grade, high-pressure, die-cast aluminium. An external embellishment was added around the camera providing a polished appearance and a higher impact resistance to the module. All fasteners are in stainless steel. The housing is covered in the highest graded polyester powder paint supporting a variety of colours.



SHUFFLE CAM GEN2 EXTERNAL | CHARACTERISTICS

KEY FEATURES

- > Resolution: full HD (1920 x 1080)
- > Image optimisation (back-light, contrasts, night vision, high luminosity)
- > Privacy layers
- > ONVIF communication standard
- > Event triggering: motion detection, video analytics, tampering...
- > Digital zoom
- > Data optimisation: selected and/or delayed transmission, on-site recording (SD memory slot)
- > On-site tilting settings: 0 - 85°

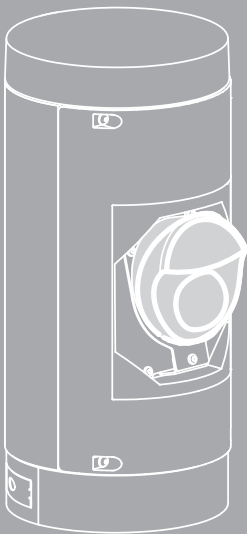


COMPARISON TABLE

	SH18C2-HK	SH18C2-GB	SH18C2-JH
Smart features	No	Yes	Yes
Angular field of view	Horizontal : 132° Vertical : 74°	Horizontal : 110° Vertical : 62°	Horizontal : 105° Vertical : 56°
IR	21m	No	10m
Power consumption	3.8W	6.4W	7.5W
UL Mark	No	Yes	Yes

DIMENSIONS AND MOUNTING

AxBxC (mm inch)	194x403x216 7.6x15.9x8.5
Weight (kg lbs)	6.4 14.1
Aerodynamic resistance (CxS)	0.08
Mounting possibilities	Clamps

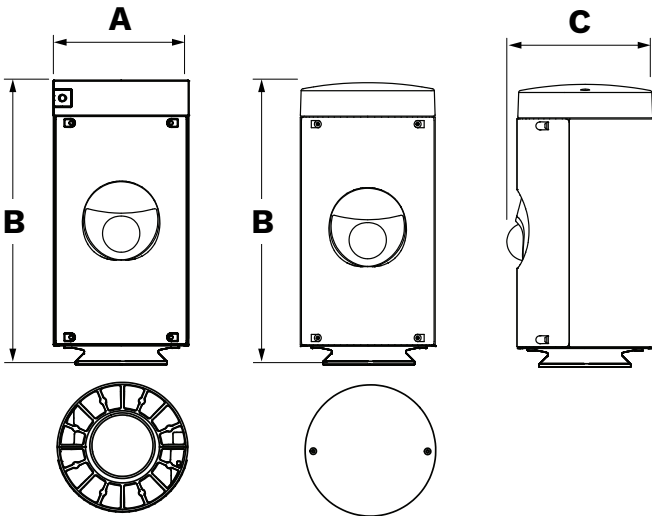

SHUFFLE CAM GEN2 EXTERNAL SH18C2-HK | CHARACTERISTICS

GENERAL

Recommended installation height	2,3m to 6,8m 7,5' to 22,3'
CE mark	Yes
UKCA mark	Yes
ROHS compliant	Yes

HOUSING AND FINISH

Housing	Aluminum
Camera support	Polycarbonate
Embellishment	Aluminum
Housing finish	Polyester powder coating
Standard colour	AKZO grey 900 sanded
Tightness level	IP 66
Impact resistance	IK 10
Ta	-40°C to +50°C -40°F to +122°F

ELECTRICAL

Electrical class	Class I EU, Class II EU, Class I US
Power consumption	3.8W

SHUFFLE

SHUFFLE Pole Versions	2 doors same side 3 doors
SHUFFLE Components	Mains box Beyond light supply box
	Support plate network
	Network cable
Location on pole	Any position



CAMERA

	[16:9 mode(60 fps mode/ 30 fps mode/ 50 fps mode/ 25 fps mode)]1920x1080/ 1280x720/ 640x360/ 320x180
Resolution H.265/ H.264 JPEG (MJPEG)	[4:3 mode(30 fps mode/ 25 fps mode)] 1280x960/ VGA/ QVGA [4:3 mode(15 fps mode/ 12.5 fps mode)] 2048x1536* / 1280x960/ VGA/ QVGA *Used by super resolution techniques
	2 mega pixel [16:9]
Focal length	2.4mm {3/32inches}
Angular field of view	[16:9 mode] Horizontal: 132° Vertical: 74° [4:3 mode] Horizontal: 99° Vertical: 74°
Maximum aperture ratio	1 : 2.1
Minimum Illumination	Color : 0.02 lx (30IRE, F2.1, 1/30 s) Color : 0.03 lx (50IRE, F2.1, 1/30 s) BW : 0.02 lx (50IRE, F2.1, 1/30 s) BW : 0 lx (50IRE, F2.1, 1/30 s with IR LED)
Focus range	0.5m {19-11/16 inches} - ∞
Adjusting angle	Horizontal (PAN) angle: ±45° Vertical (TILT) angle: 0 to +90° Azimuth (YAW) angle: ±90°
Memory card	microSDXC / microSDHC / microSD
Power source	PoE (IEEE802.3af Compliant)
No. of simultaneous users	Up to 14 users (depends on network conditions)
Network protocol	IPv6 : TCP/IP, UDP/IP, HTTP, HTTPS, RTP, FTP, SMTP, DNS, NTP, SNMP, DHCPv6, MLD, ICMP, ARP, IEEE 802.1X, DiffServ IPv4 : TCP/IP, UDP/IP, HTTP, HTTPS, RTSP, RTP, RTP/RTCP, FTP, SMTP, DHCP, DNS, DDNS, NTP, SNMP, UPnP, IGMP, ICMP, ARP, IEEE 802.1X, DiffServ SSL/TLS, SNMPv1/v2/v3, LLDP, SFTP, MQTT
Network connector	RJ45
Image sensor	Approx.1/2.8 type CMOS image sensor

SHUFFLE CAM GEN2 EXTERNAL SH18C2-GB | CHARACTERISTICS

GENERAL		CAMERA	
Recommended installation height	2,3m to 6,8m 7,5' to 22,3'	Resolution	2 mega pixel [16:9] (25/30 fps) 1,920x1,080
CE mark	Yes	H.265/ H.264	
UKCA mark	Yes	JPEG (MJPEG)	1 mega pixel [16:9] (45 fps) 1,280x720
UL mark	Yes	Focal length	2.8 mm {1/8 inches}
ROHS compliant	Yes	Angular field of view	[16 : 9 mode] Horizontal : 110° Vertical : 62°
HOUSING AND FINISH		Maximum aperture ratio	2.8mm F1.6
Housing	Aluminum	Minimum Illumination	Color: 0.06 lux at 30 IRE F1.6 B/W: 0.01 lux at 30 IRE F1.6 Color: 0.12 lux at 50 IRE F1.6 B/W: 0.02 lux at 50 IRE F1.6
Camera support	Polycarbonate	Adjusting angle	Horizontal (PAN) angle: ±30° Vertical (TILT) angle: 15 to +90° Azimuth (YAW) angle: ±175°
Embellishment	Aluminum	Memory card	microSDXC / microSDHC / microSD
Housing finish	Polyester powder coating	Power source	PoE (IEEE 802.3af)
Standard colour	AKZO grey 900 sanded	Multi-view streaming	Up to 8 individually cropped out view areas
Tightness level	IP 66	Network protocol	IPv4, IPv6 USGv6, HTTP, HTTPS, HTTP/2, TLS, QoS Layer 3 DiffServ, FTP, SFTP, CIFS/SMB, SMTP, mDNS (Bonjour), UPnP®, SNMP v1/v2c/v3 (MIB-II), DNS/DNSv6, DDNS, NTP, NTS, RTSP, RTP, SRTP/RTSPS, TCP, UDP, IGMPv1/v2/v3, RTCP, ICMP, DHCPv4/v6, ARP, SSH, LLDP, CDP, MQTT v3.1.1, Secure syslog (RFC 3164/5424, UDP/TCP/TLS), Link-Local address (ZeroConf)
Impact resistance	IK 10		
Ta	-40 °C to 55°C -40 °F to 131°F	Network connector	RJ45
ELECTRICAL		Image sensor	1/2.9" Progressive scan RGB CMOS
Electrical class	Class I EU, Class II EU, Class I US	Image optimisation	WDR mode
Power consumption	6.4 W	Smart features	Included AXIS Video Motion Detection, active tampering alarm, blocked view detection, shock detection Supported AXIS Motion Guard, AXIS Loitering Guard, AXIS Fence Guard Support for AXIS Camera Application Platform enabling installation of third-party applications.
SHUFFLE			
SHUFFLE Pole Versions	2 doors same side 3 doors		
SHUFFLE Components	Mains box Beyond light supply box		
	Support plate network		
	Network cable		
Location on pole	Any position		



SHUFFLE CAM GEN2 EXTERNAL SH18C2-JH | CHARACTERISTICS

GENERAL		CAMERA	
Recommended installation height	2,3m to 6,8m 7,5' to 22,3'	Resolution H.265/ H.264 JPEG (MJPEG)	2 mega pixel [16:9] (30 fps) 1,920x1,080
CE mark	Yes	Lens type	Fixed lens, 2/2.8/4/6/8 mm
UKCA mark	Yes	Angular field of view	2.8 mm, horizontal FOV 105°, vertical FOV 56°
UL mark	Yes	Maximum aperture ratio	2mm: F2.25 2.8 /4/6 /8mm: F1.6
ROHS compliant	Yes	Minimum illumination	Color: 0.01 Lux @ (F1.6, AGC ON)
HOUSING AND FINISH		Adjusting angle	Horizontal (PAN) angle: -30° to +30° Vertical (TILT) angle: 0° to 75° Azimuth (YAW) angle: 0° to 360°
Housing	Aluminum	Memory card	Built-in micro SD/SDHC/SDXC slot, up to 256 GB
Camera support	Polycarbonate	Power source	PoE (IEEE 802.3af)
Embellishment	Aluminum	Simultaneous live view	Up to 8 channels
Housing finish	Polyester powder coating	User/Host	Up to 16 users, 3 levels: Administrator, Operator and User
Standard colour	AKZO grey 900 sanded	Network protocol	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, Email ,RTP, RTSP, RTCP, NTP, UPnP, SMTP, SNMP, ICMP 802.1X, QoS, IPv6, Bonjour, ISUP5.0
Tightness level	IP 66	Network connector	RJ45
Impact resistance	IK 10	Image sensor	1/2.8" CMOS Progressive Scan
Ta	-30 °C to 75°C -22°F to 167°F	Image optimisation	WDR mode
ELECTRICAL		Smart features	Motion detection, video tampering alarm,
Electrical class	Class I EU, Class II EU, Class I US		Line crossing detection, Configurable intrusion detection, Unattended baggage detection, Object removal detection Face detection
Power consumption	7.5 W		
SHUFFLE			
SHUFFLE Pole Versions	2 doors same side 3 doors		
SHUFFLE Components	Mains box Beyond light supply box		
	Support plate network		
	Network cable		
Location on pole	Any position		

