

# Ashbery

landscapeforms

## Specification Sheet | AP500



Ashbery collection pays tribute to traditional lantern-style luminaires that have a special place in the American lexicon. The line includes pedestrian scale pole and wall mount luminaires alongside the pathlight. Standing at 3 feet tall, the pathlight is ideal for illuminating walkways and other pedestrian zones—enhancing safety and ambiance while maintaining a cohesive visual language across the site. Ashbery’s warm, familiar silhouette complements a variety of architectural styles, from historic to contemporary.

### Housing & Materials

Cast aluminum LED cartridge and structure. LED light engine attached to aluminum cartridge housing using magni-coated steel screws. Housing features an acrylic diffused lens. All hardware is magni-coated steel.


### Electrical

120V - 277V, 50/60Hz electronic driver. Phase cut dimming. -20°C start temperature. Surge protected. Cast aluminum driver compartment doors with weather-tight seal assembly located in the lower section of the path light.


### Light Engine

Sealed and vented LED cartridge with weatherproof quick disconnect provides ease of installation and serviceability. High powered LEDs mounted to a RoHS compliant circuit board with PMMA optics affixed to each LED on the board. Available in 2700K, 3000K, 3500K and 4000K. >80 CRI across all available color temperatures.

### Distributions



TIV



TV

### Warranty

LED lighting products are warranted for six years.

### Certification

UL Listed for Wet Location, CE, DarkSky Approved (3000K CCT or lower)



**Designed by Robert A.M. Stern Architects**

[Click here](#) for patent information related to this product.

## Specification

### Luminaire

### Luminaire

Product	LED Configuration	Light Engine Power	Color Temp	Input Voltage	Mounting	Powdercoat
AP501 (Ashbery)	T4 (6 LED/Type IV)  T5 (12 LED/Type V)	035F (350 mA)	27K (2700K)  30K (3000K)  35K (3500K)  40K (4000K)	UV1 (100-277VAC)	SM (Surface Mount)	See powdercoat color options on the Material / Colors Sheet.


AP501 – T4 – 035F – 30K – UV1 – SM - MBK

## Modifications

Part Number	Modification	Description
CPH	Custom Pole Height	
CLH	Custom Lens Height	
CPC	Custom Powdercoat Color	
--	Other	

Modifications listed are the most common changes/additions requested. If your requirements aren't shown here, select 'other' and write in the modification needed. Please provide as much detail as possible to streamline the quoting process. All modifications to standard products will require evaluation and quoting approved by Landscape Forms prior to order placement.

## AP501 Series Luminaire Dimensions and weight

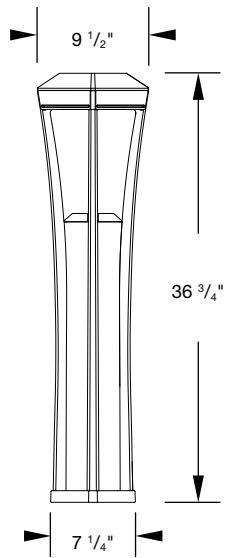

**Weight:** 30 lbs

.....

## 500 Series Luminaire Performance Data

LED Quantity	Drive Current	Lens	Distribution Type	Lumen Output*	Efficacy	Input Power (W)	BUG Rating
6	SO	Frosted	T4	425	58	7	B0-U0-G1
12	SO	Frosted	T5	841	57	15	B1-U0-G1


This data is subject to change.

\* Apply 0.9 multiplier for 2700K, 0.96 for 3000K, and 1.007 for 4000K color temperatures.

### 500 Series - 6 LED SO FRS lens at 12'

■ 1.0fc ■ 0.5fc ■ 0.2fc


Visual comfort light engine @ 3000K

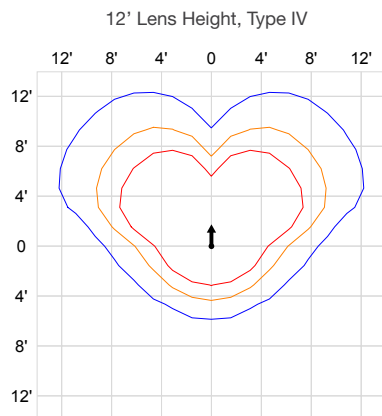


### 500 Series - 12 LED SO FRS lens at 12'

■ 1.0fc ■ 0.5fc ■ 0.2fc


Visual comfort light engine @ 3000K

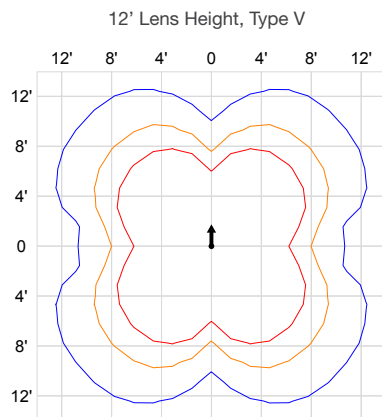

## Architectural Series - Powdercoated Metal\* (Fine Texture)

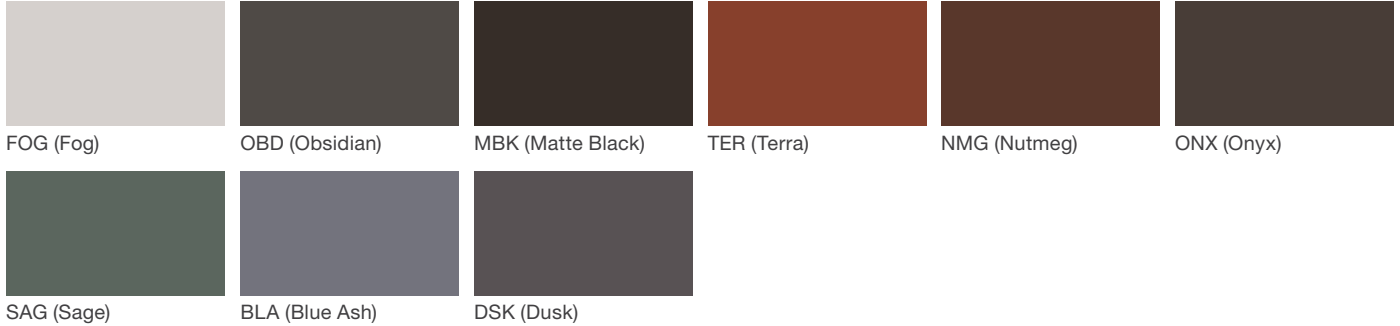

## Neutral Series - Powdercoated Metal\*

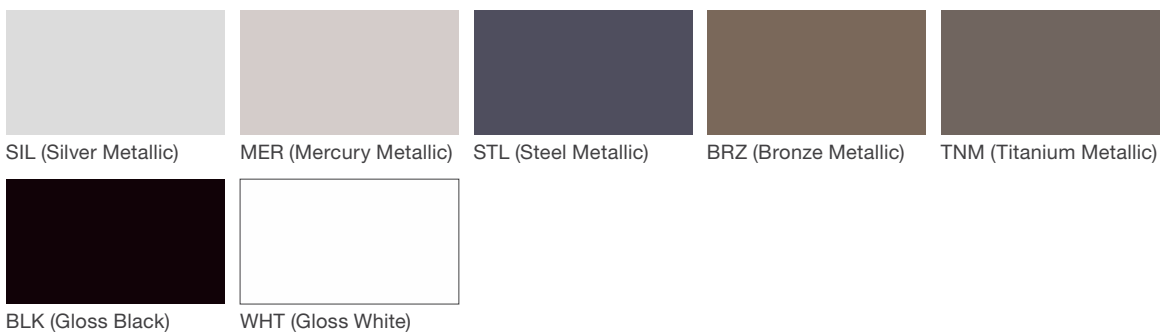

## Vivid Series - Powdercoated Metal\* (Fine Texture)



## **Powdercoated Metal**

Powdercoated Metal Pangard II® Polyester Powdercoat is a hard, yet flexible, finish that resists rusting, chipping, peeling and fading. In addition to colors shown, a wide selection of optional and custom colors may be specified for an upcharge.

\* All colors and patterns shown are approximate and may vary from sample and final.

*Visit [landscapeforms.com](https://landscapeforms.com) for more information.*

*Specifications are subject to change without notice.*

*©2026 Landscape Forms, Inc. Printed in U.S.A.*

*[landscapeforms.com](https://landscapeforms.com) | [specify@landscapeforms.com](mailto:specify@landscapeforms.com)*