

# FGP Path Light

landscapeforms®

## Product Data Sheet



The FGP path light has a pleasing flower-like organic form created by three stems that rise from the connection with the base. The soft, triangular head holds LEDs in triangular arrays that cast illumination between the verticals in a clean footprint.

High-design surface mounted LED path light uses aiming angles, color rendering and glare reduction to shape and enhance lighting performance. Aluminum cartridge houses energy efficient LEDs and provides excellent thermal management. Fixture is made of durable cast aluminum with galvanized steel base plate. Mounting hardware and template included for ease of installation.

### Lighting Facts®

Landscape Forms is committed to the development of energy efficient lighting. We participate in the Department of Energy Lighting Facts® label program. This activity is voluntary but helps consumers evaluate the multitude of products on the market today. The Lighting Facts® label provides a quick but comprehensive summary of luminaire performance as measured by the IESNA LM-79 photometric test standard for solid state lighting.

### Electrical

Surge protected 100V-277V 50/60 Hz, Class 2 driver. LED cartridge with weatherproof quick disconnect provides ease of installation and serviceability. Internal wiring completed at the factory.

### FGP Path Light Type 4

#### Type 4 Distribution

**CCT:** 2700K, 3000K, 3500K, 4000K

**Drive Current:** 250mA

**Optic:** 6 Khatod Collimators

**Lens:** Diffused Acrylite®

**Power Supply:** 100V-277V

**LED Driver:** 7W

**BUG Rating:** B0-U1-G1

**IP Rating:** IP66 for LED Cartridge

**Weight:** 31lbs

### FGP Path Light Type 5

#### Type 5 Distribution

**CCT:** 2700K, 3000K, 3500K, 4000K

**Drive Current:** 250mA

**Optic:** 9 Khatod Collimators

**Lens:** Diffused Acrylite®

**Power Supply:** 100V-277V




**LED Driver:** 7W

**BUG Rating:** B0-U1-G1




**IP Rating:** IP66 for LED Cartridge

**Weight:** 31lbs

### FGP Path Light Type 4

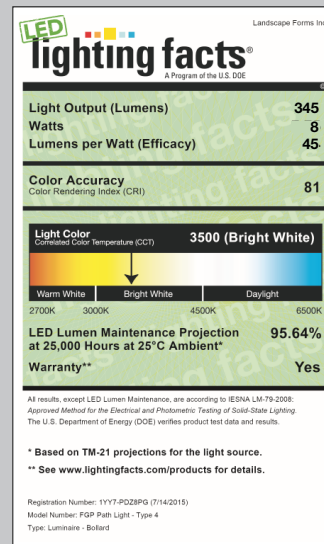

### FGP Path Light Type 5

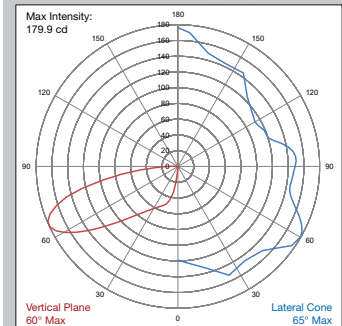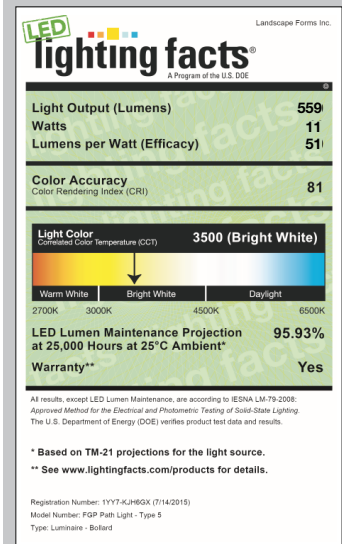

# FGP Path Light

landscapeforms®

## Product Data Sheet



### Finish

Pangard II®, offered exclusively by Landscape Forms, is a 19 step program of cleaning, priming, and powdercoating that resists rusting, chipping, peeling and fading to produce the finest metal finish available for site furniture and outdoor lighting. In addition, Pangard II® contains no heavy metals and is free of Hazardous Air Pollutants.

### To Order

Specify: Product, Lamp, Drive Current, Color Temperature, Input Voltage, and Powdercoat Color.

Product	Lamp	Drive Current	Color Temp.	Input Voltage
AG FGP	400L4 ( 6 LED, Type 4 )	025F ( 250mA )	40K ( 4000K )	UV1 ( 100-277VAC )
	400L5 ( 9 LED, Type 5 )		35K ( 3500K )	
			30K ( 3000K )	
			27K ( 2700K )	

EXAMPLE: AG – 400L4 – 025F – 35K – UV1 – Powdercoat Color

### Product Modifications

Don't see what you are looking for? Our goal is to partner with you as the designer to manufacture solutions needed for the space you are creating. We offer the option to modify our standard product to meet certain design specifications or needs. Contact your local Landscape Forms representative to learn more about these offerings.

### Warranty

LED lighting products are warranted for six years.


### Certifications

UL Listed, RoHS Compliant, Next Generation Luminaires Winner



Designed by Francisco Gomez Paz

[Click here](#) for patent information related to this product.

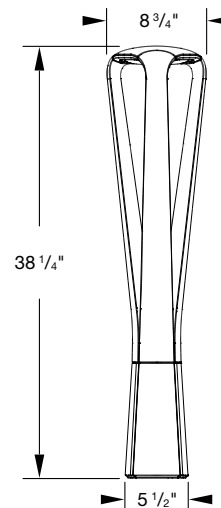

Visit [landscapeforms.com](http://landscapeforms.com) for more information. Specifications are subject to change without notice. Landscape Forms supports the Landscape Architecture Foundation at the Second Century level.  
©2022 Landscape Forms, Inc. Printed in U.S.A.

[landscapeforms.com](http://landscapeforms.com) | [specify@landscapeforms.com](mailto:specify@landscapeforms.com)